

ENGINE	HX300SL	HX300HD
Hyundai HM8.3 Engine	●	●
HYDRAULIC SYSTEM	HX300SL	HX300HD
<b>Intelligent Power Control (IPC)</b>		
3-power mode, 2-work mode, user mode	●	●
Variable power control	●	●
Pump flow control	●	●
Attachment mode flow control	○	○
Engine auto idle	●	●
Engine auto shutdown control	○	○
CAB & INTERIOR	HX300SL	HX300HD
<b>ISO Standard Cabin</b>		
Rise-up type windshield wiper	●	●
Radio / USB player	●	●
Handsfree mobile phone system with USB	●	●
12 V power outlet (24 V DC to 12 V DC converter)	●	●
Electric horn	●	●
All-weather steel cab with 360° visibility	●	●
Safety glass windows	●	●
Sliding fold-in front window	●	●
Sliding side window (LH)	●	●
Lockable door	●	●
Hot & Cool box	●	●
Storage compartment & Ashtray	●	●
Sun visor	●	●
Door and cab locks, one key	●	●
Pilot-operated slidable joystick	●	●
Cabin lights	○	○
Cabin front window rain guard	○	○
Cabin roof-steel cover	●	●
<b>Automatic Climate Control</b>		
Air conditioner & Heater	●	●
Defroster	●	●
Starting aid (air grid heater) for cold weather	●	●
<b>Centralized Monitoring</b>		
8" LCD display - Normal type	●	●
8" LCD display - Premium type	○	○
Engine speed or trip meter / Accel	●	●
Engine coolant temperature gauge	●	●
Max power	●	●
Low speed / High speed	●	●
Auto idle	●	●
Overload warning with alarm	○	○
Check engine	●	●
Air cleaner clogging	●	●
Indicators	●	●
ECO gauges	●	●
Fuel level gauge	●	●
Hyd. oil temperature gauge	●	●
Warnings	●	●
Communication error	●	●
Low battery	●	●
Clock	●	●
<b>Seat</b>		
Mechanical suspension without heater	●	●
Mechanical suspension with heater	○	○
Adjustable air suspension without heater	○	-
Adjustable air suspension with heater	○	-
<b>Cabin FOPS/FOG</b>		
FOPS (Falling object protective structures) ISO 10262 Level 2	○	○
FOG (Falling object guard)	Front & Tops guard	○
ISO/DIS 10262 Level 2	Top guard	○
<b>Cabin ROPS</b>		
ROPS (Roll over protective structures) - ISO 12117-2	○	○

SAFETY	HX300SL	HX300HD
Battery master switch	●	●
Rearview camera	○	○
AAVM (Advanced around view monitoring)	○	○
Four front working lights (2 boom mounted, 2 front frame mounted)	●	●
Travel alarm	●	●
Rear work lamp	○	○
Beacon lamp	○	○
Automatic swing brake	●	●
Boom holding system	●	●
Arm holding system	●	●
Safety lock valve for boom cylinder with overload warning device	○	○
Safety lock valve for arm cylinder	○	○
Swing Lock system	○	-
Two outside rearview mirror	●	●

ATTACHMENT	HX300SL	HX300HD
<b>Booms</b>		
6.25 m, 20' 6" Mono	●	-
6.25 m, 20' 6" Mono (HD)	-	●
10.20 m, 33' 6" Long Reach	○	○
<b>Arms</b>		
2.10 m, 6' 11"	○	○
2.5 m, 8' 2"	○	○
2.85 m, 9' 4"	○	-
3.05 m, 10' 0"	●	-
3.05 m, 10' 0" (HD)	-	●
3.75 m, 12' 4"	○	-
7.85 m, 25' 9" Long Reach	○	○

OTHERS	HX300SL	HX300HD
Removable clean-out dust net for cooler	●	●
Removable washer tank	●	●
Fuel pre-filter	●	●
Fuel warmer	○	○
Self-diagnostics system	●	●
Hi MATE (Remote management system)	○	○
Batteries (2 × 12 V × 150 AH)	●	●
Fuel filler pump (50 lpm)	○	○
Single-acting piping kit (Breaker, etc.)	○	○
Double-acting piping kit (Clamshell, etc.)	○	○
Rotating piping kit	○	○
Quick coupler piping	○	○
Quick coupler	○	○
Accumulator for lowering work equipment	●	●
Pattern change valve (4 patterns)	○	○
Fine swing control system	○	-
General type guardrail	○	○
Tool kit	○	○

UNDERCARRIAGE	HX300SL	HX300HD
Lower frame under cover (Additional)	●	-
Lower frame under cover (Normal)	●	●
<b>Track Shoes</b>		
Double grouser shoe (700 mm, 28")	○	-
Triple grouser shoe (600 mm, 24")	●	●
Triple grouser shoe (700 mm, 28")	●	●
Triple grouser shoe (800 mm, 32")	●	○

● : Standard  
○ : Option  
- : Not available

\* Standard and optional equipment may vary. Contact your Hyundai dealer for more information.  
The machine may vary according to international standards.  
\* The photos may include attachments and optional equipment that are not available in your area.  
\* Materials and specifications are subject to change without advance notice.  
\* All imperial measurements rounded off to the nearest pound or inch.

**Gross Power**  
194 kW (260 HP) at 2,200 rpm

**Net Power**  
190 kW (255 HP) at 2,200 rpm

**Bucket Capacity**  
1.27 m<sup>3</sup> (1.66 yd<sup>3</sup>)

**Operating Weight**  
30,200 kg / 66,580 lb

# HX300SL HX300HD



# WHAT'S NEWEST AND BEST

# HX300SL HX300HD



## THE BEST PRODUCTIVITY AND FUEL EFFICIENCY

- New Variable Power Control
- Fuel Rate Information **Option**
- Attachment Flow Control **Option**
- IPC (Intelligent Power Control) **Upgrade**
- ECO Gauge
- New Cooling System with Increased Air Flow
- Enlarged Air Inlet with Grill Cover



## ULTIMATE DURABILITY

- Durable Cooling Module
- Reinforced Pin, Bush, and Polymer Shim
- Reinforced Durability of Upper and Lower Structure and Attachments
- Wear Resistant Cover Plate
- Hi-grade (High-pressure) Hoses



## EASY CONTROL AND COMFORTABLE OPERATION


- Intelligent and Wide Cluster
- New Front Side Air-conditioning System
- Proportional Auxiliary Hydraulic System **Option**
- Quick Coupler Button **Option**
- New Audio System



## THE ULTIMATE SAFE ENVIRONMENT

- AAVM (Advanced Around View Monitoring) Camera System **Option**
- Hi MATE (Remote Management System) **Option**
- Cab Suspension Mount
- Swing Lock System **Option**
- Fine Swing Control **Option**
- Swing Lock System(HX300SL only) **Option**
- Fine Swing Control(HX300SL only) **Option**

\*Photo may include optional equipment.

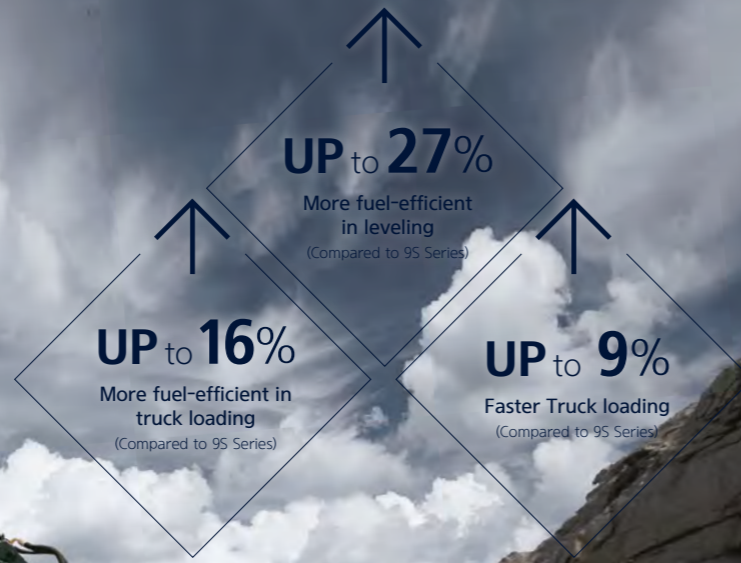

\*Photo may include optional equipment.

### New Variable Power Control

The HX Series minimizes equipment input and output control signals to improve fuel efficiency. Its three-stage power mode ensures the highest performance in any operating environment.



\* **P(power) mode** : Maximizes speed and power of the equipment for heavy load work.



\* **S(standard) mode** : Optimizes performance and fuel efficiency of the equipment for general load work.



\* **E(economy) mode** : Improves the control system for light load work.

# THE BEST PRODUCTIVITY AND FUEL EFFICIENCY

## Fuel Efficient System, Allows Great Performance


The HX Series has an eco-friendly, high-performance engine which ensures both excellent fuel efficiency and high power. With outstanding operating performance proven by rigorous tests at various work sites, it will satisfy any customer's needs.

15% increased greater screen from 7 to 8 inch is applied in HX Series.

More functions and better resolution are available with adding premium options.



Fuel Rate Information **Option**

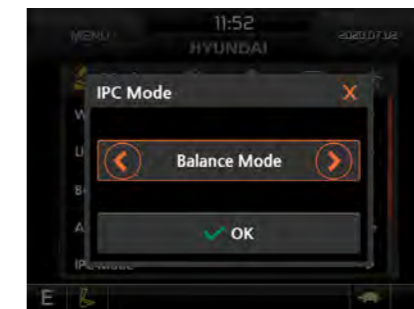

IPC (Intelligent Power Control) **Upgrade**

HX Series adopts the upgraded IPC system. It is able to optimize pump flow rate and power at the various working condition through the individual pump control. Furthermore, optimized design of MCV and pipe line minimizes energy loss such as conflux and throttle loss.




Attachment Flow Control **Option**

The HX Series improves pump flow rate by independent control of two pumps. It optimizes attachments for effective flow rate setting depending on attachments (ten breaker types and ten crusher types), enabling various operations matching the site environments.



### Eco Gauge

Eco gauge enables economic operation of machines. The gauge level and color displays engine torque and fuel efficiency level. On top of that, the status of fuel consumption such as average rate and the total amount of fuel consumed is displayed. Hourly and daily based fuel consumption can be checked in the detailed menu as well.

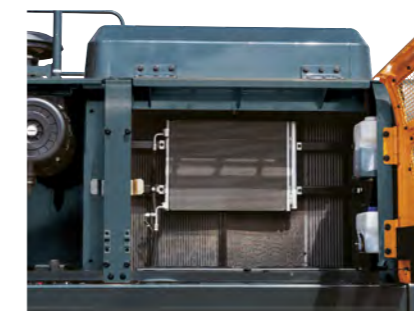

### New Cooling System with Increased Air Flow

With the cooling module improving air inflow, the HX Series provides excellent cooling performance by increasing heat dissipation.




### Enlarged Air Inlet with Grill Cover

Enlarged vent hole of the air inlet side cover and fine net grill to prevent penetration of foreign materials further improve durability.

# ULTIMATE DURABILITY

## New Exterior Design for Robustness and Safety

The true value of the HX Series lies in its durability. The robust frame structure and the attachments show the real value of the HX Series in tough working environments and promise higher productivity.

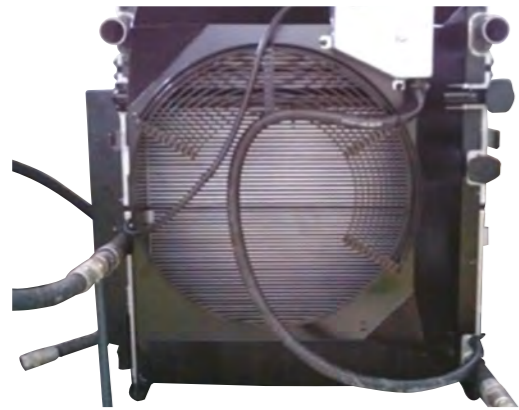

### Durable Cooling Module

The HX Series has a durable cooling module that passed stringent tests, demonstrating the highest productivity in tough working environments.



Chrome Coated Pins

### Reinforced Pin, Bush, and Polymer Shim

The HX Series improves lubricity of connecting parts between the equipment and attachments. Gaps with attachments are minimized by wear-resistant long-life pins, bushes, and polymer shims, supporting the highest performance with invariable durability.

### Wear Resistant Cover Plate

A wear-resistant cover plate is installed at the end of the arm to minimize abrasion on the connector between the arm and the bucket. Vibration reduction of buckets enables more stable operation even in high-load work.



### Reinforced Durability of Upper and Lower Structure and Attachments

The upper and lower structure and attachments of the HX Series have higher durability than demanded on the site, as proven through numerous tests including road tests and virtual simulation. The wear resistance of the bucket has been improved by use of new material.



Photo may include optional equipment.

### Hi-grade (High-pressure) Hoses

The HX Series uses high-pressure hoses with improved heat and pressure resistance, greatly increasing the durability of the equipment.



# EASY CONTROL AND COMFORTABLE OPERATION

## Improved Instrument Panel for Easier Monitoring

Many electronic functions are concentrated in the most convenient spot for operators to improve work efficiency. The highly-advanced infotainment system, a product of HCE's intensive information technology development, enables both productivity and comfort while working! The HX Series is designed with the operator in mind.




## Intelligent and Wide Cluster

The 8-inch interactive touchscreen display of the HX Series is 15% larger than that of the previous model. The centralized switches on the display allow the operator to check the temperature outside the cab.



## New Front Side Air-conditioning System

The ventilation is designed for both warm and cool air reaching to operator's faces. It could help operators create more neat and enjoyable atmosphere through indoor air circulation.

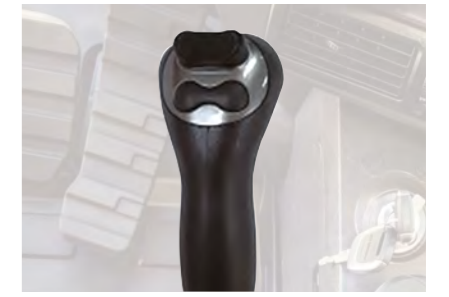

## Proportional Auxiliary Hydraulic System **Option**

- Proportional control switch for better speed control
- Enlarge the operation convenience



## Front Side Air-Vent

## Quick Coupler Button **Option**

Easy attachment replacement of equipment is available with quick coupler button.

## New Audio System

The radio player with a USB-based MP3 player, an integrated Bluetooth hands-free feature, and a built-in microphone allow for phone calls while at work and in transit. The radio player is conveniently located on the right side of the operator to allow for improved access.



\*Photo may include optional equipment.

# THE ULTIMATE SAFE ENVIRONMENT

The true value of the HX Series lies in its durability. The robust frame structure and the attachments show the real value of the HX Series in tough working environments and promise higher productivity.



## AAVM (Advanced Around View Monitoring) Camera System **Option**

The HX Series has a state-of-the-art AAVM video camera system to secure field of vision for operators in all directions, thereby preventing accidents. Operators can easily check the workplace in the front and rear and to the right and left.



\*AVM (Around View Monitoring): Secure field of vision in all directions by nine views including 3D bird's eye view and 2D/4CH view.

\*IMOD (Intelligent Moving Object Detection): Inform when people or dangerous objects are detected within the range of operation (Recognition distance: 5m).

## HiMATE **Option**

### It's Convenient, Easy and Valuable

Hi MATE Hyundai's newly developed remote management system, utilizes GPS-satellite technology to provide customers with the highest level of service and product support available. Hi MATE enables users to remotely evaluate machine performance, access diagnostic information, and verify machine locations at the touch of a button.

### What is benefits



#### Increase Productivity

It helps you operate machines in efficient. You can check the difference between total engine hours and actual working hours. See how productive your machines are and plan any required cost saving solutions. Hi MATE offers working information such as working / idling hours, fuel consumption and rate.



#### Convenient and Easy Monitoring

There is nothing much to do to monitor your machines. Just log on to the Hi MATE website or mobile application. Hi MATE allows you to watch your machines whenever and wherever you are.



#### Security

Protect your machines from theft or unauthorized usage with Hi MATE. If the machine moves out of the Geo-fence boundary, you will get alerts.



#### Cab Suspension Mount

With a low-vibration design by the coil spring and damper inside the mount, the cab suspension mount of the HX Series reduces noise inside the cabin and improves durability, providing a comfortable operation space that lessens operators' fatigue.

#### Swing Lock System(HX300SL only) **Option**

Swing lock system is provided to maintain stability when swing movement needs to be limited, improving operating speed and productivity.

#### Fine Swing Control(HX300SL only) **Option**

Fine swing control is available for customer's convenience when users want to control fine swing.

# SPECIFICATIONS

ENGINE	
Maker / Model	HYUNDAI / HM8.3
Type	6 cylinder, water cooled, 4-cycle, turbocharged, charge air cooled, direct injection, mechanical controlled diesel engine.
Gross Power	194 kW (260 HP) at 2,200 rpm
Net Power	190 kW (255 HP) at 2,200 rpm
Max. Power	195 kW (261 hp) at 2,000 rpm
Peak Torque	1,150 N · m (848 lb.ft) at 1,300 rpm
Displacement	8.3 ℓ (506 cu in)

HYDRAULIC SYSTEM	
<b>MAIN PUMP</b>	
Type	Variable displacement tandem axis piston pumps
Max. flow	2 × 285 lpm
Sub-pump for pilot circuit	Gear pump

Cross-sensing and fuel saving pump system.

HYDRAULIC MOTORS	
Travel	Two speed axial pistons motor with brake valve and parking brake
Swing	Axial piston motor with automatic brake

RELIEF VALVE SETTING	
Implement circuits	350 kgf/cm <sup>2</sup> (4,980 psi)
Travel	350 kgf/cm <sup>2</sup> (4,980 psi)
Power boost (boom, arm, bucket)	380 kgf/cm <sup>2</sup> (5,400 psi)
Swing circuit	300 kgf/cm <sup>2</sup> (4,270 psi)
Pilot circuit	40 kgf/cm <sup>2</sup> (570 psi)
Service valve	Installed

HYDRAULIC CYLINDERS	
No. of cylinder bore × stroke	Boom Ø140 x 1,465mm Arm Ø150 x 1,765mm Bucket Ø135 x 1,185mm

DRIVES & BRAKES	
Drive method	Fully hydrostatic type
Drive motor	Axial piston motor, in-shoe design
Reduction system	Planetary reduction gear
Max. drawbar pull	27,400 kgf (60,410 lbf)
Max. travel speed (high / low)	6.1 km/hr (3.8 mph) / 3.4 km/hr (2.1 mph)
Gradeability	35° (70%)
Parking brake	Multi wet disc

CONTROL	
Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.	
Pilot control	Two joysticks with one safety lever (LH) : Swing and arm, (RH) : Boom and bucket (ISO)
Traveling and steering	Two levers with pedals
Engine throttle	Electric, dial type

SWING SYSTEM	
Swing motor	Fixed displacement axial piston motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease-bathed
Swing brake	Multi wet disc
Swing speed	12.2 rpm

COOLANT & LUBRICANT CAPACITY			
	liter	US gal	UK gal
Fuel tank	500	132.1	110.0
Engine coolant	25	6.6	5.5
Engine oil	26.5	7.0	5.8
Swing device	11	2.91	2.42
Final drive (each)	8.0 (7.8)	2.06	1.72
Hydraulic system (including tank)	330	87.2	72.6
Hydraulic tank	190	50.2	41.8

UNDERCARRIAGE	
The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets, and a track chain with double or triple grouser shoes.	
Center frame	X - leg type
Track frame	Pentagonal box type
No. of shoes on each side	48 EA
No. of carrier roller on each side	2 EA
No. of track roller on each side	9 EA
No. of rail guard on each side	2 EA

OPERATING WEIGHT (APPROXIMATE)	
Operating weight, including 6,250 mm (20' 6") boom, 3,050 mm (10' 0") arm, SAE heaped 1.27 m <sup>3</sup> (1.66 yd <sup>3</sup> ) bucket, lubricant, coolant, full fuel tank, full hydraulic tank, and all standard equipments.	

OPERATING WEIGHT			
Shoes	Operating weight		Ground pressure
Type	Width mm (in)	kg (lb)	kgf/cm <sup>2</sup> (psi)
Triple grouser	600 (24")	HX300S L / HX300HD	30,200 (66,580) 0.58 (8.27)
		HX300S HW	32,490 (71,630) 0.63 (8.89)
	700 (28")	HX300S L / HX300HD	30,770 (67,840) 0.51 (7.22)
		HX300S HW	33,060 (72,880) 0.55 (7.76)
	800 (32")	HX300S L / HX300HD	31,150 (68,670) 0.45 (6.40)
		HX300S LR / HX300DLR	33,910 (74,760) 0.49 (6.96)
Double grouser	700 (28")	HX300S HW	34,000 (74,960) 0.56 (7.96)

AIR CONDITIONING SYSTEM	
The air condition system for the machine contains the fluorinated greenhouse gas with global warming potential of R134a. (Global Warming Potential : 1.430) The system hold 0.8 kg refrigerant consisting of a CO <sub>2</sub> equivalent 1.14 kg metric tonne. For more information, Please refer to the manual.	

# BUCKET SELECTION GUIDE & DIGGING FORCE

## BUCKETS

All buckets are welded with high-strength steel.

	SAE heaped m <sup>3</sup> (yd <sup>3</sup> )	CECE heaped m <sup>3</sup> (yd <sup>3</sup> )	Without cutters	With cutters	Weight kg (lb)	Tooth EA	Recommendation mm (ft/in)					
							6,250 (20' 6") Boom					10,200 (33' 6") Boom
							2,100 (6' 11") Arm	2,500 (8' 2") Arm	2,850* (9' 4") Arm	3,050 (10' 0") Arm	3,750* (12' 4") Arm	7,850 (25' 9") Arm
◆	1.27 (1.66)	1.27 (1.66)	935 (37")	1,035 (41")	460 (1,010)	5	-	-	-	-	-	●
◆	1.50 (1.96)	1.30 (1.7)	1,290 (51")	1,410 (56")	1,010 (2,230)	5	●	●	●	●	●	-
◆	1.73 (2.26)	1.50 (1.96)	1,490 (59")	1,610 (63")	1,080 (2,380)	5	●	●	●	●	●	-
◆	1.85 (2.42)	1.60 (2.09)	1,700 (67")	1,820 (72")	1,170 (2,580)	6	●	●	●	●	●	-
◆	1.27 (1.66)*	1.10 (1.44)*	1,800 (71")	1,920 (76")	1,230 (2,710)	6	■	■	▲	▲	▲	-
◆	1.46 (1.91)	1.28 (1.67)	1,310 (52")	-	1,240 (2,730)	5	●	●	●	●	■	-
◆	1.46 (1.91)	1.28 (1.67)	1,460 (57")	-	1,320 (2,910)	5	●	●	●	●	■	-
◆	1.16 (1.52)*	1.00 (1.31)*	1,340 (53")	-	1,280 (2,820)	5	●	●	●	●	-	-
◆	1.33 (1.74)*	1.16 (1.52)*	1,420 (56")	-	1,440 (3,170)	5	●	●	●	●	-	-
◆	1.49 (1.95)	1.28 (1.67)	1,620 (64")	-	1,440 (3,170)	5	●	●	■	■	-	-

- ◆ Heavy duty bucket
- ◆ Rock-Heavy duty bucket
- ★ Long reach bucket
- : Applicable for materials with density of 2,100 kgf/m<sup>3</sup> (3,500 lbf/yd<sup>3</sup>) or less
- : Applicable for materials with density of 1,800 kgf/m<sup>3</sup> (3,000 lbf/yd<sup>3</sup>) or less
- : Applicable for materials with density of 1,500 kgf/m<sup>3</sup> (2,500 lbf/yd<sup>3</sup>) or less
- ▲ : Applicable for materials with density of 1,200 kgf/m<sup>3</sup> (2,000 lbf/yd<sup>3</sup>) or less
- : Not Recommended
- \* Options not available on HX300HD

ATTACHMENT	
Booms and arms are of all-welded, low-stress, full-box section design. 6,250 mm (20' 6"), 10,200 mm (33' 6") Booms and 2,100 mm (6' 11"), 2,500 mm (8' 2"), 2,850 mm (9' 4"), 3,050mm (10' 0"), 3,750mm (12' 4"), 7,850 mm (25' 9") Arms are available, Hyundai Bucket are all-welded, high-strength steel implements.	


DIGGING FORCE										Remark
Boom	Length mm (ft/in)	6,250 (20' 6")					10,200 (33' 6")		Power Boost	
Arm	Weight kg (lb)	2,780 (6,130)					3,530 (7,780)			[ ] : Power Boost
	Length mm (ft/in)	2,100 (6' 11")	2,500 (8' 2")	2,850 (9' 4")	3,050 (10' 0")	3,750 (12' 4")	7,850 (25' 9")			
Bucket Digging Force	Weight kg (lb)	1,345 (2,970)	1,430 (3,150)	1,565 (3,450)	1,545 (3,410)	1,675 (3,690)	1,685 (3,710)			
	SAE	kN	164.8 [179.8]	165.7 [180.8]	165.7 [180.8]	165.7 [180.8]	166.7 [181.9]	70.6		
	ISO	kgf	16,800 [18,330]	16,900 [18,440]	16,900 [18,440]	16,900 [18,440]	17,000 [18,550]	7,200		
		lbf	37,040 [40,410]	37,260 [40,650]	37,260 [40,650]	37,260 [40,650]	37,480 [40,900]	15,870		
	Arm Crowd Force	SAE	kN	191.2 [208.6]	191.2 [208.6]	192.2 [209.7]	192.2 [209.7]	192.2 [209.7]	82.4	
			kgf	19,500 [21,270]	19,500 [21,270]	19,600 [21,380]	19,600 [21,380]	19,600 [21,380]	8,400	
ISO		lbf	42,990 [46,890]	42,990 [46,890]	43,210 [47,130]	43,210 [47,130]	43,210 [47,130]	18,520		
		kN	180.4 [196.8]	155.9 [170.1]	139.3 [151.9]	131.4 [143.4]	114.7 [125.1]	47.1		
ISO	kgf	18,400 [20,070]	15,900 [17,350]	14,200 [15,490]	13,400 [14,620]	11,700 [12,760]	4,800			
	lbf	40,570 [44,250]	35,050 [38,250]	31,310 [34,150]	29,540 [32,230]	25,790 [28,130]	10,580			
ISO	kN	190.3 [207.5]	163.8 [178.7]	145.1 [158.4]	136.3 [148.7]	119.6 [130.5]	48.1			
	kgf	19,400 [21,160]	16,700 [18,220]	14,800 [16,150]	13,900 [15,160]	12,200 [13,310]	4,900			
ISO	lbf	42,770 [46,650]	36,820 [40,170]	32,630 [35,600]	30,640 [33,420]	26,900 [29,340]	10,800			

Note : Boom weight includes arm cylinder, piping, and pin  
Arm weight includes bucket cylinder, linkage, and pin

# DIMENSIONS & WORKING RANGE

## HX300S L / HX300HD DIMENSIONS

6.25 m (20' 6"), 10.2 m (33' 6") BOOM and 2.1 m (6' 11"), 2.5 m (8' 2"), 2.85m (9' 4"), 3.05 m (10' 0"), 3.75 m (12' 4"), 7.85m (25' 9") ARM

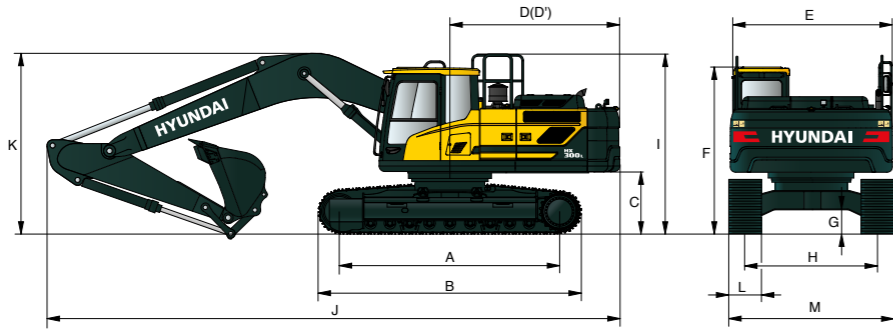

Unit : mm (ft-in)


A	Tumbler distance	4,030 (13' 3")
B	Overall length of crawler	4,940 (16' 2")
*C	Ground clearance of counterweight	1,185 (3' 9")
D	Tail swing radius	3,345 (11' 0")
D'	Rear-end length	3,265 (10' 9")
E	Overall width of upperstructure	2,980 (9' 9")
*F	Overall height of cab	3,130 (10' 3")
G	Min. ground clearance	500 (1' 8")
H	Track gauge	2,600 (8' 6")
*I	Overall height of guardrail (Opt)	3,336 (10' 11")

Boom length	6,250 (20' 6")						10,200 (33' 6")
Arm length	2,100 (6' 11")	2,500 (8' 2")	2,850 (9' 4")	3,050 (10' 0")	3,750 (12' 4")	7,850 (25' 9")	
J Overall length	10,900 (35' 9")	10,850 (35' 7")	10,790 (35' 5")	10,740 (35' 3")	10,810 (35' 6")	14,750 (48' 5")	
*K Overall height of boom	3,720 (12' 2")	3,560 (11' 8")	3,390 (11' 1")	3,320 (10' 11")	3,570 (11' 9")	3,560 (11' 8")	
L Track shoe Width	600 (24")	700 (28")	800 (32")				
M Overall Width	3,200 (10' 6")	3,300 (10' 10")	3,400 (11' 1")				

\* This figure includes the size of grousers.

## HX300S L / HX300HD WORKING RANGE

Unit : mm (ft-in)

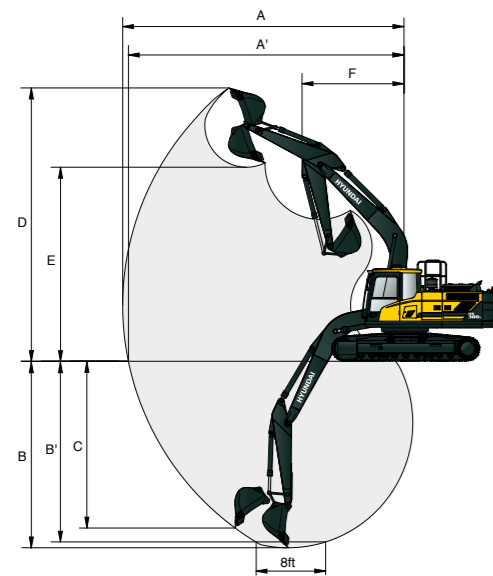


Boom length	6,250 (20' 6")						10,200 (33' 6")
Arm length	2,100 (6' 11")	2,500 (8' 2")	2,850 (9' 4")	3,050 (10' 0")	3,750 (12' 4")	7,850 (25' 9")	
A Max. digging reach	10,040 (32' 11")	10,310 (33' 10")	10,620 (34' 10")	10,810 (35' 6")	11,420 (37' 6")	18,530 (60' 10")	
A' Max. digging reach on ground	9,820 (32' 3")	10,100 (33' 2")	10,410 (34' 2")	10,610 (34' 10")	11,230 (36' 10")	18,410 (60' 5")	
B Max. digging depth	6,380 (20' 11")	6,780 (22' 3")	7,130 (23' 5")	7,330 (24' 1")	8,030 (26' 4")	14,740 (48' 4")	
B' Max. digging depth (8' level)	6,180 (20' 3")	6,600 (21' 8")	6,960 (22' 10")	7,170 (23' 6")	7,890 (25' 11")	14,660 (48' 1")	
C Max. vertical wall digging depth	5,910 (19' 5")	5,760 (18' 11")	6,030 (19' 9")	6,280 (20' 7")	6,990 (22' 11")	13,700 (44' 11")	
D Max. digging height	10,130 (33' 3")	9,980 (32' 9")	10,090 (33' 1")	10,200 (33' 6")	10,410 (34' 2")	14,590 (47' 10")	
E Max. dumping height	6,990 (22' 11")	6,930 (22' 9")	7,050 (23' 2")	7,150 (23' 5")	7,360 (24' 2")	12,270 (40' 3")	
F Min. swing radius	4,420 (14' 6")	4,320 (14' 2")	4,320 (14' 2")	4,270 (14' 0")	4,220 (13' 10")	6,270 (20' 7")	

# DIMENSIONS & WORKING RANGE

## HX300S HW DIMENSIONS

6.25 m (20' 6") BOOM and 2.1 m (6' 11"), 2.5 m (8' 2"), 2.85m (9' 4"), 3.05 m (10' 0"), 3.75 m (12' 4") ARM

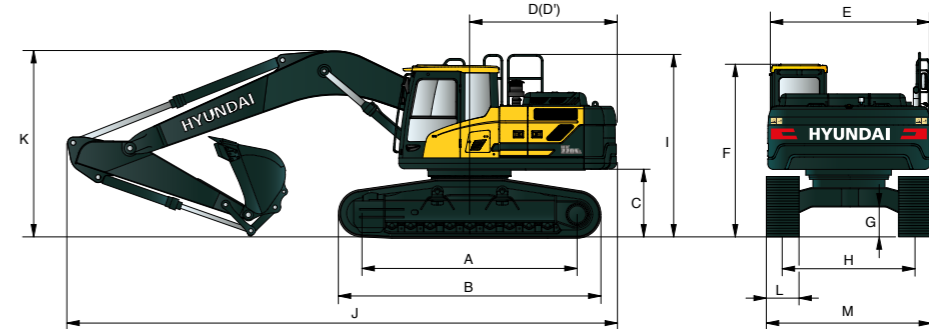

Unit : mm (ft-in)


A	Tumbler distance	4,030 (13' 3")
B	Overall length of crawler	5,010 (16' 5")
*C	Ground clearance of counterweight	1,490 (4' 11")
D	Tail swing radius	3,345 (11' 0")
D'	Rear-end length	3,265 (10' 9")
E	Overall width of upperstructure	2,980 (9' 9")
*F	Overall height of cab	3,435 (11' 3")
G	Min. ground clearance	765 (2' 6")
H	Track gauge	2,870 (9' 5")
*I	Overall height of guardrail	3,650 (12' 0")

Boom length	6,250 (20' 6")						
Arm length	2,100 (6' 11")	2,500 (8' 2")	2,850 (9' 4")	3,050 (10' 0")	3,750 (12' 4")		
J Overall length	10,870 (35' 8")	10,780 (35' 4")	10,650 (34' 11")	10,590 (34' 9")	10,670 (35' 0")		
*K Overall height of boom	3,830 (12' 7")	3,660 (12' 0")	3,490 (11' 5")	3,320 (11' 3")	3,540 (11' 7")		
L Track shoe Width	600 (24")	700 (28")	800 (32")				
M Overall Width	3,470 (11' 5")	3,570 (11' 9")	3,670 (12' 0")				

\* This figure includes the size of grousers.

## HX300S HW WORKING RANGE

Unit : mm (ft-in)

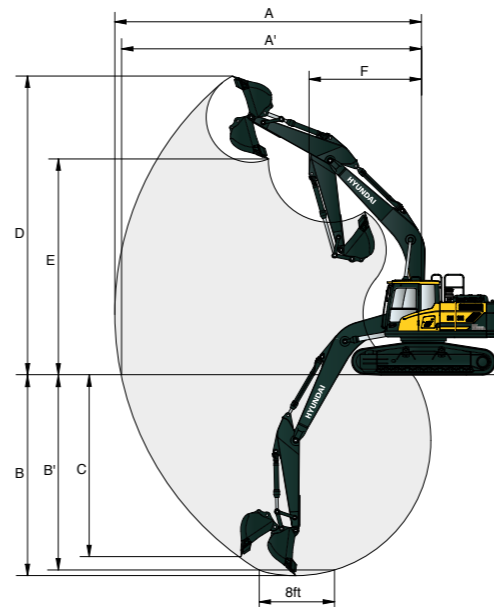

Boom length	6,250 (20' 6")						
Arm length	2,100 (6' 11")	2,500 (8' 2")	2,850 (9' 4")	3,050 (10' 0")	3,750 (12' 4")		
A Max. digging reach	10,040 (32' 11")	10,310 (33' 10")	10,620 (34' 10")	10,810 (35' 6")	11,420 (37' 6")		
A' Max. digging reach on ground	9,750 (32' 0")	10,020 (32' 10")	10,410 (34' 2")	10,540 (34' 7")	11,170 (36' 8")		
B Max. digging depth	6,060 (19' 11")	6,460 (21' 2")	7,130 (23' 5")	7,010 (23' 0")	7,710 (25' 4")		
B' Max. digging depth (8' level)	5,860 (19' 3")	6,280 (20' 7")	6,960 (22' 10")	6,850 (22' 6")	7,570 (24' 10")		
C Max. vertical wall digging depth	5,590 (18' 4")	5,440 (17' 10")	6,030 (19' 9")	5,960 (19' 7")	6,670 (21' 11")		
D Max. digging height	10,450 (34' 3")	10,300 (33' 10")	10,090 (33' 1")	10,520 (34' 6")	10,730 (35' 2")		
E Max. dumping height	7,320 (24' 0")	7,250 (23' 9")	7,050 (23' 2")	7,470 (24' 6")	7,680 (25' 2")		
F Min. swing radius	4,420 (14' 6")	4,320 (14' 2")	4,320 (14' 2")	4,270 (14' 0")	4,220 (13' 10")		



# LIFTING CAPACITY

Rating over-front Rating over-side or 360 degree

## HX300S L / HX300HD

6.25 m (20' 6") boom, 2.10 m (6' 11") arm equipped with 600 mm (24") triple grouser shoe and 5,200 kg counter weight.

Lift point height m (ft)	Lift radius								At max. reach	
	3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity	Reach
7.5 m (24.6 ft)					*7,670 *7,670				*7,890	7,270
6.0 m (19.7 ft)					*16,910 *16,910				*17,390	16,030
4.5 m (14.8 ft)					*7,900 *7,900				*7,790	5,630
3.0 m (9.8 ft)					*17,420 *17,420				*17,170	12,410
1.5 m (4.9 ft)					*8,950 7,670		*7,930 5,470	7,630 4,850		8,060
Ground Line					*19,730 16,910		*17,480 12,060	16,820 10,690		(26.5)
-1.5 m (-4.9 ft)					*10,270 7,270		8,410 5,290	7,090 4,480		8,370
-3.0 m (-9.8 ft)					*22,640 16,030		18,540 11,660	15,630 9,880		(27.5)
-4.5 m (-14.8 ft)					*11,350 6,960		8,220 5,130	6,960 4,380		8,400
					*25,020 15,340		18,120 11,310	15,340 9,660		(27.6)
					*11,330 6,810		8,120 5,040	7,220 4,520		8,160
					24,980 15,010		17,900 11,110	15,920 9,960		(26.8)
					*15,530 10,360		11,310 6,800	8,020 4,990		7,600
					*34,240 22,840		24,930 14,990	17,680 11,000		(24.9)
					*18,440 *18,440		*14,030 10,560	*10,600 6,940		6,660
					*40,650 *40,650		*30,930 23,280	*23,370 15,300		(21.9)
					*10,580 *10,580			*8,760 *8,760		5,120
					*23,320 *23,320			*19,310 *19,310		(16.8)

6.25 m (20' 6") boom, 2.50 m (8' 2") arm equipped with 600 mm (24") triple grouser shoe and 5,200 kg counter weight.

Lift point height m (ft)	Lift radius								At max. reach	
	3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity	Reach
7.5 m (24.6 ft)					*6,980 *6,980				*6,760	6,760
6.0 m (19.7 ft)					*15,390 *15,390				*14,900	14,900
4.5 m (14.8 ft)					*7,380 *7,380		*7,170 5,630	*6,440 5,330		7,740
3.0 m (9.8 ft)					*16,270 *16,270		*15,810 12,410	*14,200 11,750		(25.4)
1.5 m (4.9 ft)					*10,660 *10,660		*8,470 7,750	*7,530 5,500		8,340
Ground Line					*23,500 *23,500		*16,600 12,130	*14,150 10,190		(27.4)
-1.5 m (-4.9 ft)					*13,720 10,980		*9,850 7,320	*8,180 5,300		8,640
-3.0 m (-9.8 ft)					*30,250 24,210		*21,720 16,140	*18,030 11,680		(28.3)
-4.5 m (-14.8 ft)					*11,040 6,970		8,220 5,120	6,630 4,160		8,670
					*24,340 15,370		18,120 11,290	14,620 9,170		(28.4)
					*16,170 10,220		11,300 6,770	8,080 5,000		6,840
					*35,650 22,530		24,910 14,930	17,810 11,020		(27.7)
					*11,150 *11,150		*15,780 10,240	11,240 6,730		8,060
					*24,580 *24,580		*34,790 22,580	24,780 14,840		17,770
					*19,830 *19,830		*14,550 10,410	*10,980 6,830		9,000
					*43,720 *43,720		*32,080 22,950	*24,210 15,060		(22.9)
					*15,970 *15,970		*11,820 10,790			*9,210 7,980
					*35,210 *35,210		*26,060 23,790			*20,300 17,590

6.25 m (20' 6") boom, 2.85 m (9' 4") arm equipped with 600 mm (24") triple grouser shoe and 5,200 kg counter weight.


Lift point height m (ft)	Lift radius								At max. reach	
	3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity	Reach
7.5 m (24.6 ft)									*5,020	5,020
6.0 m (19.7 ft)									*11,070	*11,070
4.5 m (14.8 ft)					*6,850 *6,850		*6,660 5,630	*4,800 *4,800		8,080
3.0 m (9.8 ft)					*15,100 *15,100		*14,680 12,410	*10,580 *10,580		(26.5)
1.5 m (4.9 ft)					*9,820 *9,820		*7,960 7,760	*7,120 5,470		4,790
Ground Line					*21,650 *21,650		*17,550 17,110	*15,700 12,060		9,480
-1.5 m (-4.9 ft)					*12,880 11,090		*9,380 7,310	*7,830 5,260		4,960
-3.0 m (-9.8 ft)					*28,400 24,450		*20,680 16,120	*17,260 11,600		*10,930 8,770
-4.5 m (-14.8 ft)					*15,120 10,380		*10,670 6,920	8,160 5,050		5,310
					*33,330 22,880		*23,520 15,260	17,990 11,130		*11,710 8,550
					*15,970 10,110		11,220 6,690	8,000 4,910		*5,940 3,970
					*35,210 22,290		24,740 14,750	17,640 10,820		*13,100 8,750
					*11,280 *11,280		*15,830 10,080	11,120 6,610		7,940
					*24,870 *24,870		*34,900 22,220	24,520 14,570		17,500
					*18,980 *18,980		*14,840 10,220	*11,130 6,670		8,250
					*41,840 *41,840		*32,720 22,530	*24,540 14,700		18,190
					*17,280 *17,280		*12,560 10,540	*9,020 6,960		*8,940 6,920
					*38,100 *38,100		*27,690 23,240	*19,890 15,340		*19,710 15,260

1 | Lifting capacity are based on ISO 10567.

2 | Lifting capacity of the Robex Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3 | The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4 | (\*) indicates load limited by hydraulic capacity.

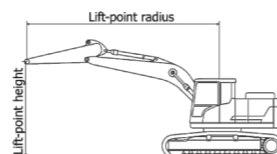

# LIFTING CAPACITY

Rating over-front Rating over-side or 360 degree

## HX300S L / HX300HD

6.25 m (20' 6") boom, 3.05 m (10' 0") arm equipped with 600 mm (24") triple grouser shoe and 5,200 kg counter weight.

Lift point height m (ft)	Lift radius										At max. reach	
	3.0m (9.8 ft)		4.5m (14.8 ft)		6.0m (19.7 ft)		7.5m (24.6 ft)		9.0m (29.5 ft)		Capacity	Reach
7.5 m (24.6 ft)											*4,410 *4,410	7.38
6.0 m (19.7 ft)											*9,720 *9,720	(24.2)
4.5 m (14.8 ft)					*7,670 *7,670		*6,490 5,710		*14,310 12,590		*4,220 *4,220	8.30
3.0 m (9.8 ft)					*17,480 12,060		*7,630 4,850		*15,390 12,210		*9,300 *9,300	(27.2)
1.5 m (4.9 ft)					*8,950 7,670		*7,930 5,470		*12,510 11,250		*4,210 4,200	8.86
Ground Line					*19,730 16,910		*17,480 12,060		*17,110 *17,110		*9,280 9,260	(29.1)
-1.5 m (-4.9 ft)					*10,270 7,270		8,410 5,290		*7,260 *7,260		*5,490 4,000	9.14
-3.0 m (-9.8 ft)					*22,640 16,030		18,540 11,660		*9,210 7,400		*7,720 5,320	(30.0)
-4.5 m (-14.8 ft)					*11,350 6,960		8,220 5,130		*27,580 24,800		*12,100 8,820	8.40
					*25,020 15,340		18,120 11,310		*20,300 16,310		*6,190 3,900	9.17
					*11,330 6,810		8,120 5,040		*14,900 10,490		*4,640 3,790	(30.1)
					24,980 15,010		17,900 11,110		*32,850 23,130		*10,230 8,360	8.94
					*15,530 10,360		11,310 6,800		*23,260 15,430		*5,160 3,870	(29.3)
					*34,240 22,840		24,930 14,990		24,870 14,860		*11,380 8,530	8.44
					*18,440 *18,440		*14,030 10,560		*13,040 10,520		*6,050 4,180	(27.7)
					*40,650 *40,650		*30,930 23,280		*9,550 6,920		*13,340 9,220	7.61
					*10,580 *10,580				*21,050 15,260		*7,770 4,870	(25.0)
					*23,320 *23,320						*17,130 10,740	6.32
											*8,810 6,480	(20.7)
											*19,420 14,290	

6.25 m (20' 6") boom, 3.75 m (12' 4") arm equipped with 600 mm (24") triple grouser shoe and 5,200 kg counter weight.


Lift point height m (ft)	Lift radius								At max. reach				
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity	Reach	
9.0 m (29.5 ft)											*3,820 *3,820	6.87	
7.5 m (24.6 ft)											*8,420 *8,420	(22.6)	
6.0 m (19.7 ft)					*10,960 *10,960		*8,340 7,530		*5,120 *5,120		*3,490 *3,490	8.14	
4.5 m (14.8 ft)					*24,160 *24,160		*18,390 16,600		*11,290 *11,290		*7,690 *7,690	(26.7)	
3.0 m (9.8 ft)					*13,740 10,700		*9,850 7,070		*5,700 *5,700		*3,370 *3,370	8.97	
1.5 m (4.9 ft)					*30,290 23,590		*21,720 15,590		*12,570 *12,570		*7,430 *7,430	(29.4)	
Ground Line					*6,810 *6,810		*10,980 6,740		*5,230 4,140		*4,110 3,780	9.50	
-1.5 m (-4.9 ft)					*15,010 *15,010		*33,910 22,440		*24,210 14,860		*17,680 10,850	(31.2)	
-3.0 m (-9.8 ft)					*7,070 *7,070		*10,570 *10,570		*15,920 10,000		*11,090 6,570	9.11	
-4.5 m (-14.8 ft)					*15,590 *15,590		*23,300 *23,300		*35,100 22,050		24,450 14,480	*12,590 8,250	(29.9)
					*11,090 *11,090		*15,460 *15,460		*15,540 10,020		11,060 6,540	*5,900 4,180	
					*24,450 *24,450		*34,080 *34,080		*34,260 22,090		24,380 14,420	*13,010 9,220	
					*15,990 *15,990		*20,280 *20,280		*14,140 10,230		*10,510 6,680	8.35	
					*35,250 *35,250		*44,710 *44,710		*31,170 22,550		*23,170 14,730	(27.4)	
											*8,250 5,240	7.19	
											*18,190 11,550	(23.6)	
											*8,670 8,240	5.38	
											*19,110 18,170	(17.6)	

1 | Lifting capacity are based on ISO 10567.

2 | Lifting capacity of the Robex Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3 | The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).

4 | (\*) indicates load limited by hydraulic capacity.

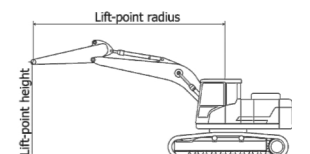

# LIFTING CAPACITY

# MEMO

Rating over-front Rating over-side or 360 degree

## HX300S HW

6.25 m (20' 6") boom, 3.05 m (10' 0") arm equipped with 600 mm (24") triple grouser shoe and 5,200 kg counter weight.

Lift point height m (ft)		Lift radius										At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		9.0 m (29.5 ft)		Capacity	Reach	
9.0 m (29.5 ft)	kg lb											*4,760 *10,490	*4,760 *10,490	6.34 (20.8)
7.5 m (24.6 ft)	kg lb						*5,020 *11,070	*5,020 *11,070				*4,340 *9,570	*4,340 *9,570	7.63 (25.0)
6.0 m (19.7 ft)	kg lb				*6,840 *15,080	*6,840 *15,080	*6,560 *14,460	*6,560 *14,460				*4,200 *9,260	*4,200 *9,260	8.45 (27.7)
4.5 m (14.8 ft)	kg lb			*10,120 *22,310	*10,120 *22,310	*8,080 *17,810	*8,080 *17,810	*7,140 *15,740	6,600 14,550			*4,230 *9,330	*4,230 *9,330	8.95 (29.4)
3.0 m (9.8 ft)	kg lb			*13,160 *29,010	*13,160 *29,010	*9,540 *21,030	8,830 19,470	*7,900 *17,420	6,370 14,040	*5,780 12,740	4,830 10,650	*4,400 *9,700	*4,400 *9,700	9.17 (30.1)
1.5 m (4.9 ft)	kg lb			*15,250 *33,620	12,840 28,310	*10,800 *23,810	8,440 18,610	*8,620 *19,000	6,150 13,560	*6,100 *13,450	4,730 10,430	*4,740 *10,450	4,630 10,210	9.14 (30.0)
Ground Line	kg lb	*6,560 *14,460	*6,560 *14,460	*16,020 *35,320	12,580 27,730	*11,570 *25,510	8,220 18,120	8,630 19,030	6,020 13,270			*5,320 *11,730	4,790 10,560	8.86 (29.1)
-1.5 m (-4.9 ft)	kg lb	*12,500 *27,560	*12,500 *27,560	*15,840 *34,920	12,570 27,710	*11,710 *25,820	8,150 17,970	8,590 18,940	5,980 13,180			*6,340 *13,980	5,240 11,550	8.29 (27.2)
-3.0 m (-9.8 ft)	kg lb	*19,800 *43,650	*19,800 *43,650	*14,760 *32,540	12,720 28,040	*11,060 *24,380	8,230 18,140					*8,390 *18,500	6,240 13,760	7.36 (24.2)
-4.5 m (-14.8 ft)	kg lb	*17,010 *37,500	*17,010 *37,500	*12,280 *27,070	*12,280 *27,070							*8,860 *19,530	8,700 19,180	5.93 (19.4)

## HX300S LR / HX300HD LR

10.20 m (33' 6") boom, 7.85 m (2' 7") arm equipped with 800 mm (31") triple grouser shoe and 7,000 kg counter weight.

Lift point height m (ft)		Lift radius												At max. reach												
		1.5 m (4.9 ft)	3.0 m (9.8 ft)	4.5 m (14.8 ft)	6.0 m (19.7 ft)	7.5 m (24.6 ft)	9.0 m (29.5 ft)	10.5 m (34.4 ft)	12.0 m (39.4 ft)	13.5 m (44.3 ft)	15.0 m (49.2 ft)	16.5 m (54.1 ft)	Capacity	Reach												
135 m (443 ft)	kg lb														*750 *1,650	*750 *1,650	12.91 (42.4)									
120 m (394 ft)	kg lb												*1,000 *2,200			*690 *1,520	*690 *1,520	14.11 (46.3)								
105 m (344 ft)	kg lb												*1,300 *2,870	*1,300 *2,870	*700 *1,540		*660 *1,460	15.06 (49.4)								
90 m (295 ft)	kg lb												*1,480 *3,260	*1,480 *3,260	*1,090 *2,400		*650 *1,430	15.82 (51.9)								
75 m (246 ft)	kg lb												*1,650 *3,640	*1,650 *3,640	*1,340 *2,950		*640 *1,410	16.40 (53.8)								
60 m (197 ft)	kg lb									*2,010 *4,430	*2,010 *4,430	*1,850 *4,080	*1,850 *4,080	*1,540 *3,400	*890 *1,960		*650 *1,430	16.83 (52.2)								
45 m (148 ft)	kg lb									*2,570 *5,670	*2,570 *5,670	*2,370 *5,220	*2,370 *5,220	*2,120 *4,670	*1,750 *3,860	*1,750 *3,860	*1,110 *2,450	*670 *1,480	17.11 (56.1)							
30 m (98 ft)	kg lb			*8,050 *17,750	*8,050 *17,750	*4,570 *10,080	*4,570 *10,080	*3,880 *8,550	*3,880 *8,550	*3,430 *7,560	*2,910 *6,420	*2,910 *6,420	*2,460 *5,420	*2,460 *5,420	*1,970 *4,340	*1,970 *4,340	*1,270 *2,800	*700 *1,540	17.25 (56.6)							
15 m (49 ft)	kg lb			*4,070 *8,970	*4,070 *8,970	*7,170 *15,810	*7,170 *15,810	*5,470 *12,060	*5,470 *12,060	*4,490 *9,900	4,450 9,810	*3,860 *8,510	3,550 7,830	*3,440 *7,580	2,870 6,330	*2,900 *6,390	2,360 5,200	*2,210 *4,870	1,950 4,300	*1,380 *3,040	17.27 (56.7)					
Ground Line	kg lb		*1,230 *2,710	*1,230 *2,710	*3,010 *6,640	*3,010 *6,640	*7,180 *15,830	7,030 15,500	*6,260 *13,800	5,270 11,620	*5,050 *11,130	4,130 9,110	*4,270 *9,410	3,320 7,320	*3,740 *8,250	2,710 5,970	*3,360 *7,410	2,240 4,940	*2,440 *5,380	1,860 4,100	*1,410 *3,110	*810 *1,790	17.15 (56.3)			
-15 m (-49 ft)	kg lb	*1,280 *2,820	*1,280 *2,820	*1,770 *3,900	*1,770 *3,900	*3,090 *6,810	*3,090 *6,810	*5,900 *13,010	*5,900 *13,010	*5,900 *13,010	*5,900 *13,010	*6,260 *13,810	5,270 11,620	*5,050 *11,130	4,130 9,110	*4,270 *9,410	3,320 7,320	*3,740 *8,250	2,710 5,970	*3,360 *7,410	2,240 4,940	*1,410 *3,110	*810 *1,790	17.15 (56.3)		
-30 m (-98 ft)	kg lb	*1,920 *4,230	*1,920 *4,230	*2,410 *5,310	*2,410 *5,310	*3,550 *7,830	*3,550 *7,830	*5,840 *12,870	*5,840 *12,870	*7,330 *16,160	4,700 10,360	*5,890 *12,990	3,690 8,140	*4,920 *10,850	2,980 6,570	4,170 9,190	2,460 5,420	3,520 7,760	2,060 4,540	*2,630 *5,800	1,740 3,840	*1,000 *2,200	*1,000 *2,200	16.50 (54.1)		
-45 m (-148 ft)	kg lb	*2,570 *5,670	*2,570 *5,670	*3,100 *6,830	*3,100 *6,830	*4,190 *9,240	*4,190 *9,240	*6,310 *13,910	*6,310 *13,910	6,230 13,730	*7,600 *16,760	4,580 10,100	*7,600 *16,760	4,580 10,100	13,470 29,870	10,870 23,870	6,370 14,130	9,020 19,920	5,270 11,660	4,430 9,760	*5,270 *11,660	3,770 8,370		*2,510 *5,510	15.96 (52.3)	
-60 m (-197 ft)	kg lb	*3,270 *7,210	*3,270 *7,210	*3,860 *8,510	*3,860 *8,510	*5,000 *11,020	*5,000 *11,020	*7,130 *15,720	*7,130 *15,720	6,220 13,710	*7,700 *16,980	4,530 9,990	6,060 13,360	3,520 7,760	4,880 10,760	2,840 6,260	4,060 8,950	2,360 5,200	3,450 7,610	1,990 4,390	*1,720 *3,790	1,710 3,770		*1,340 *2,950	15.24 (50.0)	
-75 m (-246 ft)	kg lb	*4,020 *8,860	*4,020 *8,860	*4,710 *10,380	*4,710 *10,380	*5,970 *13,160	*5,970 *13,160	*8,300 *18,300	*8,300 *18,300	6,290 13,870	*7,620 *16,800	4,560 10,050	6,070 13,380	3,530 7,780	4,890 10,780	2,850 6,280	4,070 8,970	2,360 5,200	3,260 7,190	2,010 4,430				*1,630 *3,590	14.33 (47.0)	
-90 m (-295 ft)	kg lb	*4,850 *10,690	*4,850 *10,690	*5,690 *12,540	*5,690 *12,540	*7,170 *15,810	*7,170 *15,810	*9,220 *20,330	*9,220 *20,330	6,440 14,200	*7,350 *16,200	4,650 10,250	6,040 13,320	3,600 7,940	4,950 10,910	2,900 6,390	4,130 9,110	2,420 5,340							*2,100 *4,630	13.19 (43.3)
-105 m (-344 ft)	kg lb	*5,790 *12,760	*5,790 *12,760	*6,860 *15,120	*6,860 *15,120	*8,720 *19,220	*8,720 *19,220	*11,490 *25,480	*11,490 *25,480	6,660 14,680	*7,620 *16,800	4,810 10,600	5,610 12,370	3,730 8,220	4,950 10,910	2,900 6,390	4,130 9,110	2,420 5,340							*2,960 *6,530	11.74 (38.5)
-120 m (-394 ft)	kg lb			*8,320 *18,340	*8,320 *18,340	*9,440 *20,810	*9,440 *20,810	*7,340 *16,180	6,990 15,410	*5,900 *13,010	5,070 11,180	*4,770 *10,520	3,950 8,710												*4,190 *9,240	9.85 (32.3)
-135 m (-443 ft)	kg lb																									

- 1 | Lifting capacity are based on ISO 10567.
- 2 | Lifting capacity of the Robex Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- 3 | The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).
- 4 | (\*) indicates load limited by hydraulic capacity.

